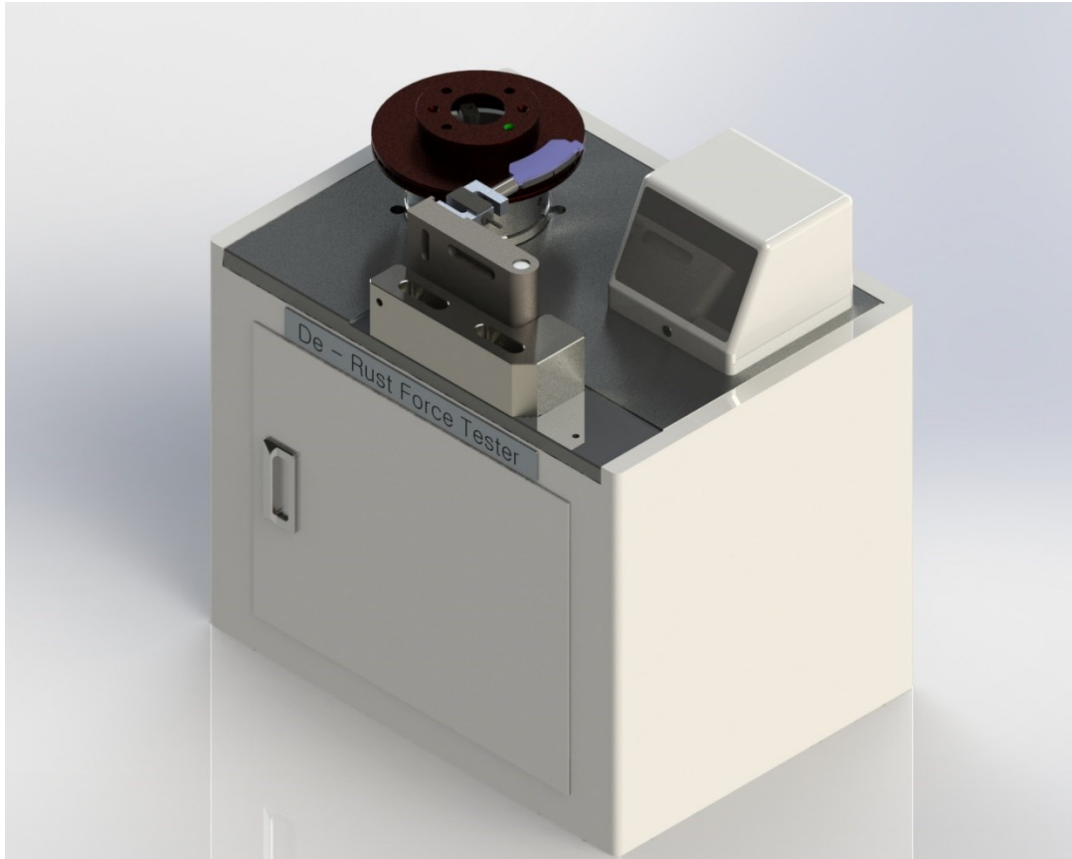

De-rust Force Tester

(Model: SF-L)



501-267 Shinjeong-ro, Yangcheon-gu Seoul, 158-073, KOREA
[158-073 서울시 양천구 신정로 267, 501 (신정동 양천벤처타운)]

Tel: +82-2-2065-5100, Fax: +82-2-2065-5222

sunix@sunbees.co.kr, www.sunbees.co.kr

Overview / 概要 / 개요

SF-L is an automatic De-rust force measuring system of the brake pad on rotor.

The drive unit of the equipment rotate the pad that adhered on the disc (or drum) due to the rust till split by the Force sensor. The split force held and printed.

It is useful to investigate adhesion coefficient with rust of pad.

SF-L是，自动测定，分离制动盘和制动垫衬由生锈粘贴的状态所需的力量（分离力）的测定仪器。

SF-L은 제동반과 브레이크 패드가 녹에 의해 고착된 상태를 분리하는데 필요한 힘(분리력)을 자동으로 측정하는 시험기다.

Features / 特点 / 특징

1. Universal Rotor mounting fixture.
2. Sensor level adjustable by one touch Knob.
3. Automatic run and stop Actuator.
4. Measurement Value holding.
5. Versatile analyzing software by “Sunware SF-L”

1. 公用概念的制动盘安装用JIG。
2. 简单调整传感器高度的器具。
3. 气压式制动盘旋转器。
4. 简单起动及显示部位
5. 使用“Sunware SF-L”，可测定、分析多种数据。

1. 公用개념의 제동반 장착 지그
2. 간단한 센서 높이 조절기구
3. 공압식 제동반 회전 장치
4. 단순한 작동 및 표시부
5. “Sunware SF-L”에 의한 다양한 측정, 분석 기능

Specification	
Force range / 测定范围	0~300 kg
Force Accuracy / 传感精密度	0.1% F.S
Stroke range / 驱动距离	0~100 mm
Weight / 重量	35kg
Dimension / 尺寸	L600 x W400 x H 800 mm

※ Above specifications are subject to change without prior notice for performance improvements.

※ 为了提高性能，上述规格在未通知的情况下，会略有变化。

※ 상기 사양은 성능향상을 위하여 사전예고 없이 변경 가능함.

Distributors

[America]

Greening Inc.

www.greeninginc.com

info@greeninginc.com

Tel: +1-313-366-7160

[Europe]

Krauss GmbH

www.kraussgmbh.de

inf@kraussgmbh.de

Tel: +49-7141-788932-0

[China]

Beijing Forayco Trading Co., Ltd.

www.forayco.com

fdd@vip.163.com

Tel: +86-1390118640

[India]

Accurate Engineering Co. Pvt. Ltd.

www.accurateengg.com

accurateengg@accurate.co.in

Tel: +91-20-66069595